

TROMTRAK 1250

Drum unwinder, manual

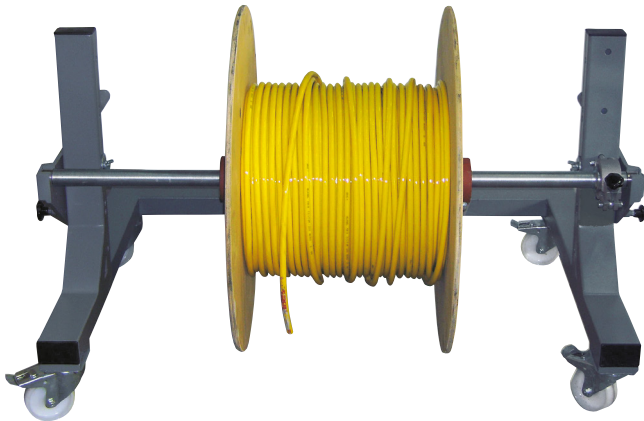


Fig. 1 TROMTRAK 1250 with reel sample incl. axles with centering cones

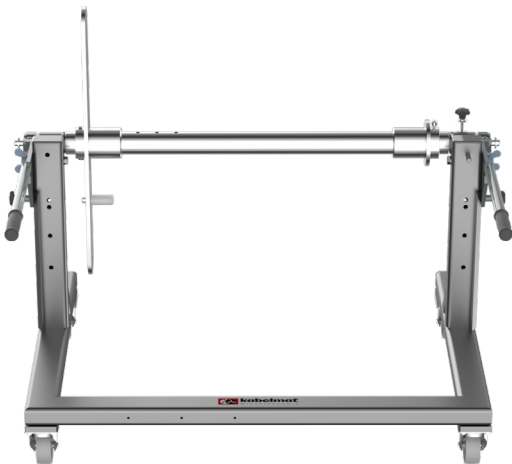


Fig. 2 TROMTRAK 1250 incl. adjustable driving pin Ø 28 mm

TROMTRAK 1250

- Manual drum unwinder with adjustable brake

Functionality:

The manual drum unwinders enables to unwind the drums easy and twisting-free at the place of processing. This unwinder is qualified for drums made from wood, steel and plastics and a perfect addition to a Kabelmat cutting automat.

- Suitable for usage in a mechanical processing line
- Base frame with brakeable driving wheels
- Drum axle with adjustable shoe brake
- Double bearing axle
- Stabil steel welded construction

Perfect complement
to processing line

Technical data	TROMTRAK 1250 with centering cones	TROMTRAK 1250 with driving pin Ø 25 mm	TROMTRAK 1250 with driving pin Ø 28 mm
Part No.	85100011	85100581	85100582
Reel Ø	630 - 1250 mm	630 - 1250 mm	630 - 1250 mm
Reel axle Ø	34 mm	34 mm	60 mm
Load capacity	max. 250 kg	max. 250 kg	max. 500 kg
Reel width	max. 890 mm	max. 730 mm (at bore 40 mm) max. 810 mm (at bore 80 mm)	max. 900 mm (at bore 80 mm)
L x W x H	approx. 860 x 1300 x 720 mm	approx. 860 x 1300 x 720 mm	approx. 860 x 1300 x 720 mm
Colour	RAL 7005 mouse grey	RAL 7005 mouse grey	RAL 7005 mouse grey
Weight	approx. 50 kg	approx. 50 kg	approx. 60 kg
Adjustment range driving pin	-	80 - 170 mm	100 - 300 mm




Fig. 3 Shoe brake