

KOMBITRAK 800

Coil and spool unwinder, manual

For heavy coils
and spools



Fig. 1 KOMBITRAK 800 T with coiler head RAPID 800 SL




Fig. 2 Back side
KOMBITRAK 800 T



Fig. 3 Back side
KOMBITRAK 800 B



Fig. 4 Spool winding axle 800 MB

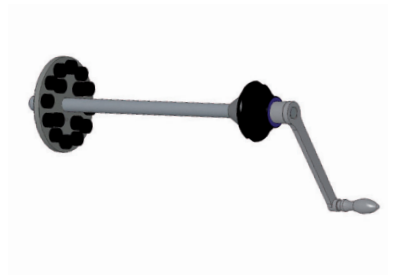


Fig. 5 Spool winding axle 800 RM

KOMBITRAK 800

- Manual coil and spool unwinder with mechanical brake or pendulum with rope brake

Functionality:

This manual coil and spool unwinder enables to unwind material like cables, wires etc. from coils or spools. Adjustable brake mechanism avoid an uncontrolled material flow.

- Twisting-free pull unwind the winding material
- Adjustable brake mechanism avoid an uncontrolled material flow
- Easy assembly and removal of the coils and spools
- Continuous and central tension of the coils

KOMBITRAK 800

Coil and spool unwinder, manual

Base frame

Technical data	KOMBITRAK 800 B	KOMBITRAK 800 T
Part No.	87000305	85100912
Brake mechanism	with mechanical brake	with pendulum and rope brake
Winding head-Ø / Spool-Ø	max. 800 mm	max. 800 mm
Locating bore	30 mm	30 mm
Loading weight	max. 150 kg	max. 150 kg
L x W x H	approx. 1200 x 1000 x 1000 mm	approx. 1200 x 1000 x 1000 mm
Colour	RAL 7005 mouse grey	RAL 7005 mouse grey
Weight	approx. 70 kg	approx. 70 kg
Flow direction	both sides	from right to left

Coiler head without hand crank

Technical data	RAPID 480 SL	RAPID 800 SL
Part No.	85100082	85100101
Coil-Ø	max. 480 mm	max. 800 mm
Core adjusting range	200 - 370 mm	300 - 550 mm
Coil width	50 - 250 mm	50 - 250 mm
Load capacity	max. 65 kg	max. 80 kg
Axle holder-Ø	30 mm	30 mm
Weight	approx. 40 kg	approx. 70 kg
Colour	RAL 3020 traffic red	RAL 3020 traffic red

Spool winding axle without hand crank

Technical data	Spool winding axle 800 MB	Spoolwinding axle 800 RM
Part No.	85100103	87000224
Spool-Ø	max. 800 mm	max. 800 mm
Spool width	max. 395 mm (at bore 40 mm)	max. 430 mm (at bore hole 35 mm)
	max. 470 mm (at bore 80 mm)	max. 445 mm (at bore hole 50 mm)
		max. 475 mm (at bore hole 85 mm)
Core bore of the spool	40 - 80 mm	35 - 85 mm
Axle holder-Ø	30 mm	30 mm
Axle-Ø	30 mm	30 mm
Load capacity	max. 50 kg	max. 100 kg
Weight	approx. 8 kg	approx. 10 kg
Colour	zinc-plated	zinc-plated
Driving pin	Ø 25 mm with an adjustment range of 80 - 170 mm	-